



YVV / NYY / PP 00


Multi Core / Copper Conductor / PVC insulated / PE Tape / PVC Sheath

Low Voltage Energy Cable

Rated Voltage: U₀/U; 0,6 / 1 kV

INTEKAR GLOBAL Corporation

Standard: TS IEC 60502-1 / IEC 60502 – 1 / HD 603 S1 / VDE 0276

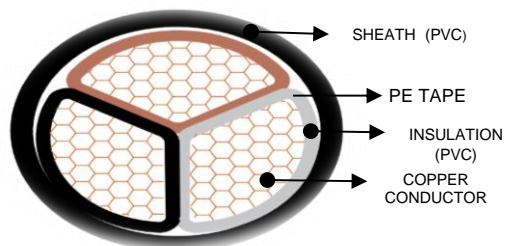

Technical Data		Cable Structure	
Core temperature, max.	70°C in Operation	Conductor	IEC 60228 Class 2
Max. Short Circuit Temperature	160°C / 5 sec.	Insulation	PVC IEC 60502-1
Bending Radius, min.	15 x D cable	Color of Insulation	Brown, Black, Grey
Max. Permissible Tensile	50 N / mm ²	Filler	IEC 60502-1
Rated current carrying capacity	One system	Sheath	PVC IEC 60502-1
		Color of Sheath	Black

Application

The power cables with insulation of PVC are designed for distribution and supply of consumers with nominal voltage 0,6/1 kV and frequency 50 Hz in industrial installation and urban networks. It is used in power centers, switchgear and industrial facilities, as the power cable in the distribution, in places where the risk of mechanical damage is high (outside, inside), underground and cable used in channels.

SM - multiwire sector shaped conductor

DIMENSIONS AND WEIGHTS			ELECTRICAL PROPERTIES			
Number of cores x Nominal Cross Section	Conductor Shape	Cable Diameter (Approximately)	Length of Cable (Approximately)	Conductor DC Resistance at 20 °C	Rated current carrying capacity (A)	
No x mm ²	-	mm	m	ohm/km	Under Ground 20 °C	In Air 30 °C
3x50	SM	24,6	1000	0,387	185	159
3x70	SM	27,0	1000	0,268	228	202
3x95	SM	30,7	1000	0,193	275	244
3x120	SM	33,1	500	0,153	313	282
3x150	SM	36,8	500	0,124	353	324
3x185	SM	40,6	500	0,0991	399	371
3x240	SM	45,6	500	0,0754	464	436
3x300	SM	50,2	250	0,0601	524	481