


	YAVV / NAYY / PP 00-A
	Multi Cores / Aluminum Conductor / PVC insulated / PE Tape/ PVC Sheath
	Low Voltage Energy Cable
	Rated Voltage: Uo/U; 0,6 / 1 kV
INTEKAR GLOBAL Corporation	Standard: TS IEC 60502-1 / IEC 60502 – 1 / HD 603 S1 / VDE 0276

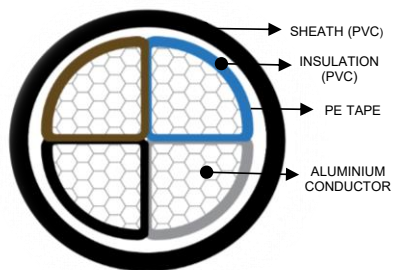

Technical Data		Cable Structure	
Core temperature, max.	70°C in Operation	Conductor	IEC 60228 Class 2
Max. Short Circuit Temperature	160°C / 5 sec.	Insulation	PVC IEC 60502-1
Bending Radius, min.	15 x D cable	Color of Insulation	Brown, Black, Grey, Blue
Max. Permessble Tensile	30 N / mm ²	Filler	IEC 60502-1
Rated current carrying capacity	One system	Sheath	PVC IEC 60502-1
		Color of Sheath	Black

Application

The power cables with insulation of PVC are designed for distribution and supply of consumers with nominal voltage 0,6/1 kV and frequency 50 Hz in industrial installation and urban networks. It is used in power centers, switchgear, as distribution cables, places where the risk of mechanical damage is high, outdoors, indoors, underground or used in cable ducts.

SM - multiwire sector shaped conductor

DIMENSIONS AND WEIGHTS			ELECTRICAL PROPERTIES			
Number of cores x Nominal Cross Section	Conductor Shape	Cable Diameter (Approximately)	Length of Cable	Conductor DC Resistance at 20 °C	Rated current carrying capacity (A)	
No x mm ²	–	mm	m	ohm/km	Under Ground 20 °C	In Air 30 °C
4x50	SM	25,4	1000	0,641	142	124
4x70	SM	28,6	1000	0,443	176	158
4x95	SM	33,0	1000	0,320	211	160
4x120	SM	36,0	1000	0,253	242	220
4x150	SM	40,0	1000	0,206	270	252
4x185	SM	44,4	500	0,164	308	289
4x240	SM	50,2	500	0,125	363	339
4x300	SM	55,4	500	0,100	412	377
4x400	SM	63,6	500	0,0778	475	444